




## On rigging jibs.

See page 2 for remarks. The parts shown here are available, see section 3 of our price list.

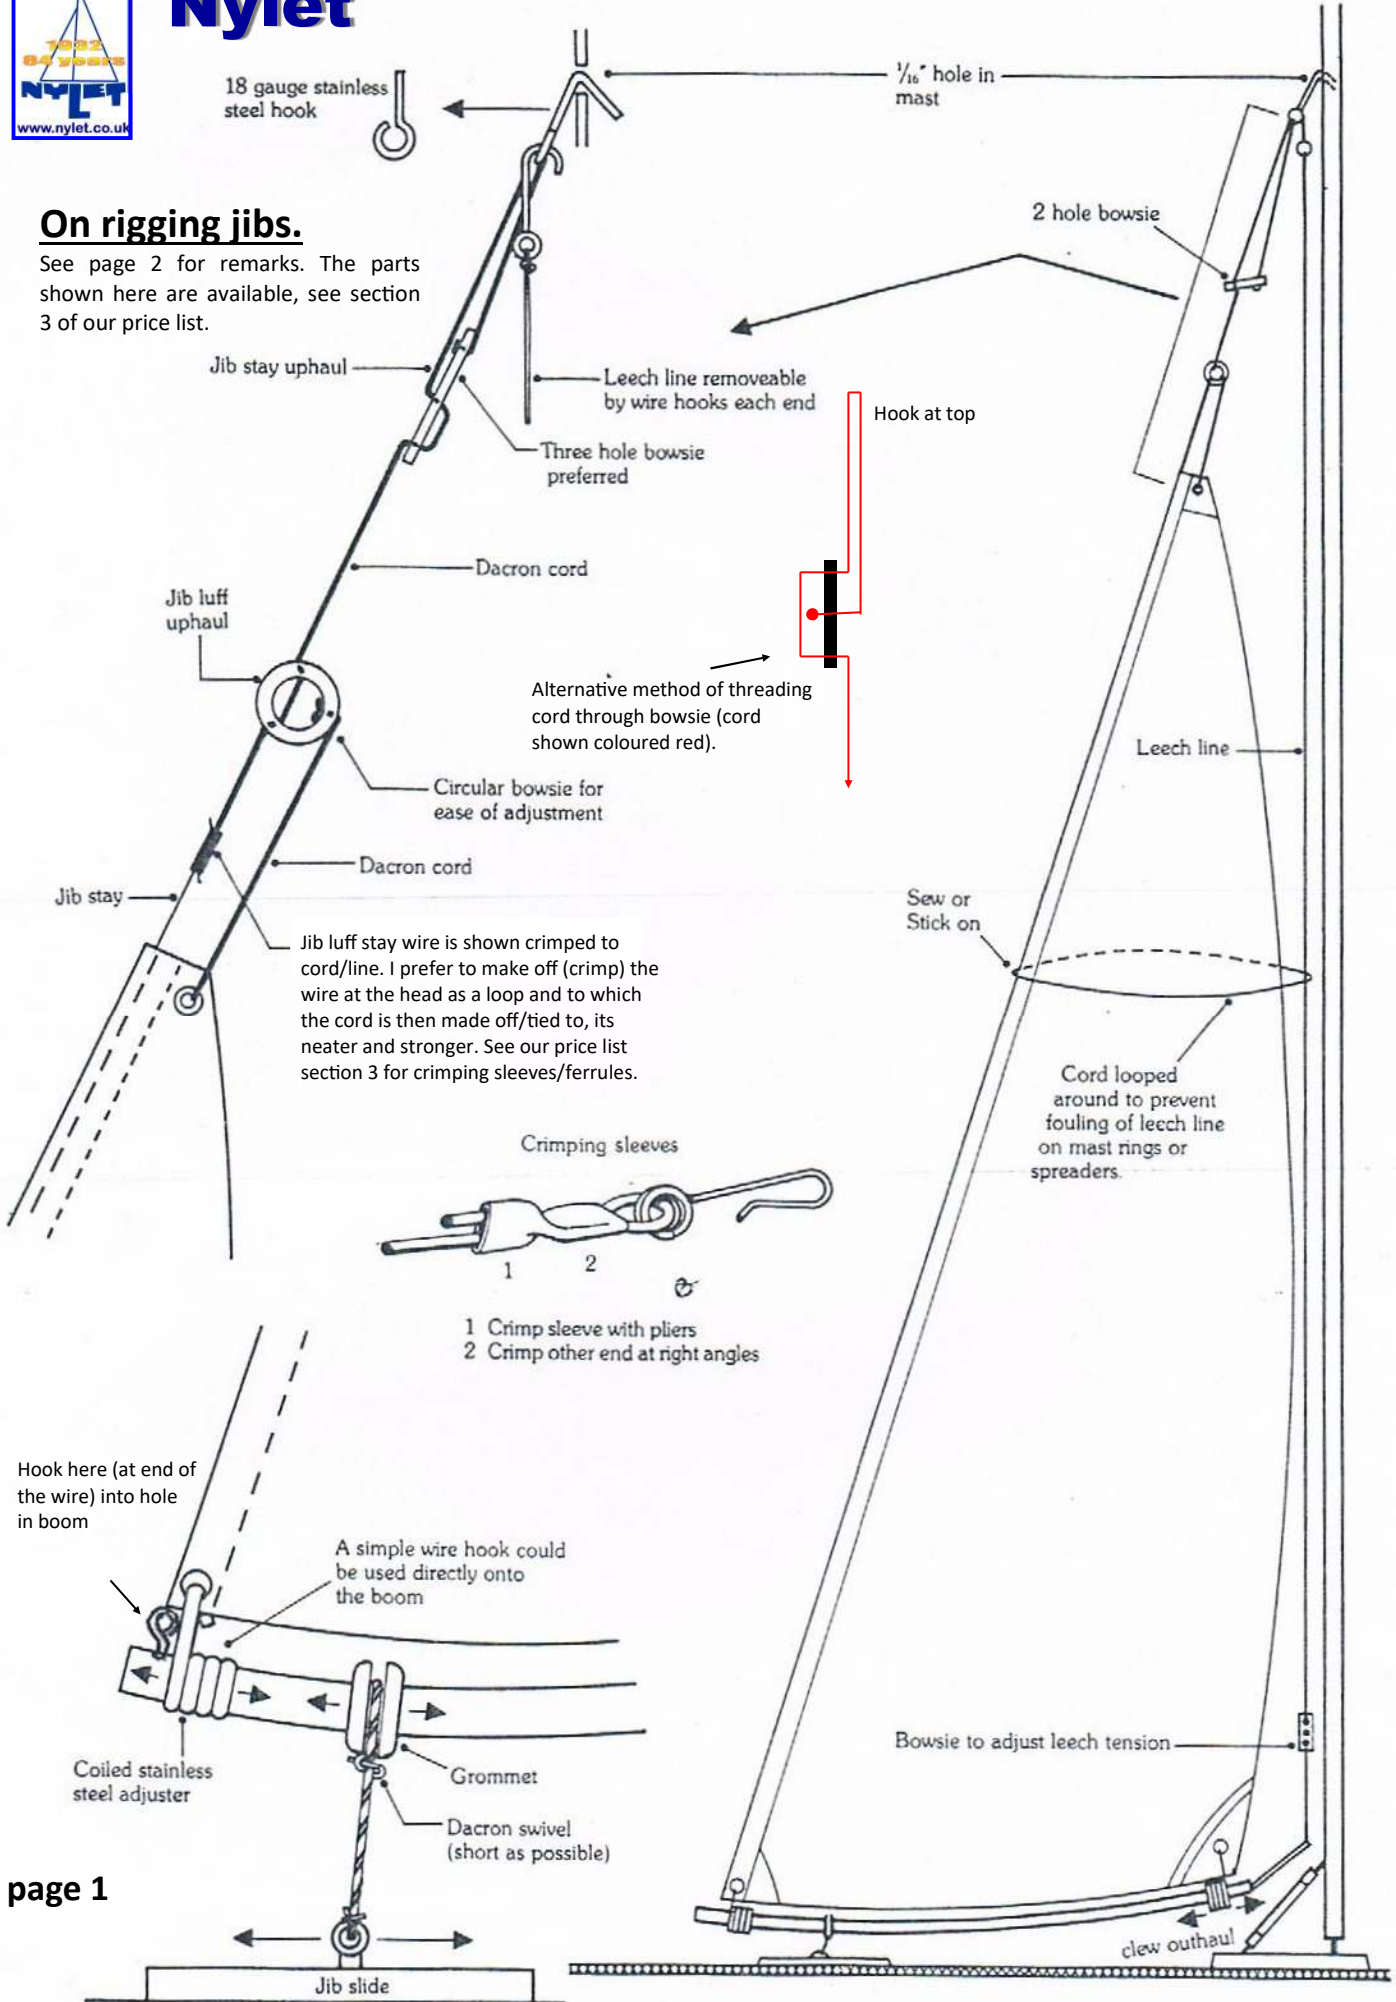

## USEFUL TIPS.

We have collected these 'tips' from emails sent to customers in reply to their questions, or from experience, in the hope that you might find something that is useful. If your query isn't here or for more information see the Nylet BB3 "how to" booklet.

The drawing on page 1. Although this drawing shows a jib boom which is bent into a curve (this being a favourite technique at the time of the drawing) it isn't currently usual and providing the fores'l hasn't an excessive foot roach it is best ignored.

Upon the subject of adhesives.

Bonding bow bumpers and cleaning deck before applying deck patches. White spirit is fine for cleaning around the deck area – certainly if its GRP or epoxy. Again, white spirit for the final clean around bumper area. Firstly rough up/key both GRP and floppy bumper with 800 grade wet and dry, used dry. Finally wipe over both surfaces with white spirit. Ensure surfaces are completely free of dust/grease and clean and dry. Bond using bathroom sealant (not Dow Corning however, it doesn't bond well enough). Whatever you are bonding do remember to be diligent over prepping the surfaces. If they are greasy or oily or dusty then you can't expect anything but an indifferent bond.

Types of adhesives giving good results. I have used 24 hour Araldite in the past, also 2 ton Devcon. The latter is extremely successful when bonding dissimilar items, i.e. wood to plastics, to GRP materials, and epoxy based materials, and metals such as aluminium and brass. When bonding epoxy to glassfibre, for example, then Devcon is almost the 'only' adhesive to use to give a permanent bond. Note that a glassfibre based resin will not give a permanent bond to epoxy. Most 'fast' adhesives tend not to be waterproof and are best avoided, after all a waterproof bond in a yacht is the one thing you are aiming to achieve! So avoid those fast glues, they may be convenient but that may come at the expense of your work falling to bits when on the lake! An exception is one of the 'cyano' glues – Zap-A-Gap is an American manufactured product, it will gap fill, it is medium fast, grabbing inside 10 minutes and will go off completely overnight. It bonds dissimilar items, it stops knots shifting, it bonds metal to GRP, as well as wood and plastic, and it is totally waterproof. It really is the marine modeller's friend, and is invaluable for bonding the smaller items or small areas. It can also be a quick remedy at the pond side, so carry it with you on sailing days in your 'fix it' box! It has a snap fit cap, keep the nozzle clean before replacing the cap and it will last for 2 years!

Preparation before bonding surfaces – and see the previous entry. Also a 'warning' about GRP (glassfibre) hulls and mouldings. The inside (the side which has been laid up with cloth) might appear 'rough' but it isn't, if you were to inspect it under a microscope you would see that the glass resin is about as smooth as glass. It is also dusty, just about the worse cocktail to be trying to bond anything to it, so prep the surface very thoroughly. The outside, the gel coat side, is equally 'smooth', but to the naked eye it appears 'worse' – well it isn't, both sides need the same amount of prepping. See the previous entry for method.

Timber is a porous material and so it receives an adhesive readily, but I still give it a 'key' by lightly scoring the surface to be bonded with a Stanley knife, or similar. Again, the slow Araldite and the 2 ton Devcon are admirable adhesives used on wood.

Working with carbon-fibre (keel fins & tubing). Do not drill tubing, this will fatally weaken the material, use carbon tow and secure fittings in place using an 2 part epoxy adhesive (such as Devcon 2 ton). When cutting/sawing flat sheet use masking tape along both sides of the surface to be cut, this avoids splitting. Finish the edge with a fine to medium file and then apply some Devcon to seal the edge, finish the surface when set, again, with a file.

Beware of household glues such as bathroom fillers, sealants and general handyman adhesives, they are often the wrong adhesives for the yacht builder, some are not waterproof, some do not give a durable bond, some will not adhere to epoxy and glassfibre, or wood.

Bow bumpers. We only make these to fit our own range of IOM yachts; but if you are making your own I am reliably informed that "SUGRU" is an idea compound to make rubber like bumpers. It is available on Amazon.

A tip (from our BB3 booklet). The rudder. This is also a brake so use it sparingly. Coming up to a buoy you will find that easing the sails using the radio control stick will change the course of the yacht, as you prepare to turn begin the turn with the attitude of the sails, and complete the main turn by using the rudder, again, as sparingly as possible. A smooth turn with minimum rudder will hardly slow the boat and you can then apply drive on the new tack early, powering out of the turn and leaving the rest behind!

At the beginning of a race. An entire book might well be written on sailing techniques, pitfalls to avoid, and yet another on racing and rules! But crossing the line at full tilt and on the nail of the gun is a recipe for a cracking good start. So hang back, get to know at the 5 second mark just where you need to be to drive over the line on the nail. If you can lead from the very start then there is every reason that you will maintain the lead throughout that race. And remember that the shortest line is a straight line; and yes, you will have to tack but don't do so unnecessarily.

For the "secrets" of sail setting and how to use the jib which is the mainsail's partner, see next page (also BB3 booklet).

## **Nylet**

[www.nylet.co.uk](http://www.nylet.co.uk)



## Tips on setting/rigging your new Nylet sails (or any sail cut correctly).

Rigging sails is not a 2 minute job, it is important to understand what you are trying to achieve. A badly rigged sail will not look right nor will it be able to do the job required of it. The control of the mast shape is 80% of achieving a well set mainsail; a jib is somewhat easier to set, but correctly placed shrouds (side rigging wires) are key to get the right mast shape. Play around with the yacht rigged at the pondside, or in your garden, on a day where light airs prevail. Lets say your yacht is rigged, so you then fit/attach the mainsail & jib. As you hoist/tension the main luff you will alter the set of the mast, and conversely as you alter the tension of the shrouds/forestay & backstay then the set of the mainsail will alter/deteriorate/improve. A whole chapter could be written on this subject, but the result is key to the yachts performance.

## Some important points regarding sails that you should know.

### "Flow" in sails.

That "hollow" shape in a sail – otherwise known as “belly” - its the essential "flow" that every sail must have, without that you would have bought a towel or a bedsheet! In fair to normal weather sails flow is more obvious but in heavier weather (smaller/reduced area) sails they are of course made with less flow and it isn't so visible. As you know, in light airs you will set your sails "slacker" and ease the tension in the foot so it takes a nice curve, and as the wind increases you will tend to harden down. That is until the wind reaches the point when you have to reduce canvas and the smaller sails will be made with much reduced flow and you set them harder (as you will do also with the standing rigging).

Here is a reminder about setting the jib, importantly it is the mainsail's friend, or partner and the jib boom must be let out a tad more than the mains'l boom, if not the mains'l will fail to set and you will lose drive, and way. This is because the air passing between jib & mains'l **MUST** be induced to speed up and in so doing the mains'l will be "sucked" into the area of reduced pressure between the 2 sails and its shape will fill. This extra drive that is created is your passport to more speed! Ignore this technique and its your loss. Its precisely the same effect that creates lift in the wing of an aircraft, because of its shape the wing is induced to move into the area of lower pressure (above), without that a plane cannot fly and it is as vital in yacht's sails as it is in the wing of an aircraft!

Have fun experimenting and get accustomed to adjusting the set of your sails, remember - slack winds slack sails & rigging, stiffer winds harden down, really heavy winds then smaller sails and increasingly harden down. And as my old dad used to say, blowing so you can't stand, then time to batten down the hatches, sport a handkerchief and make for home!!

All this and more is explained fully in our “how to” BB3 booklet.

# Nylet

38b Winchester Street,  
Salisbury,

SP1 1HG UK

Workshop: 07474 939535

Office: 01722 239251

Email: frank.nylet@outlook.com

[www.nylet.co.uk](http://www.nylet.co.uk)



05/2018 file name - jibtips

